



Led Product Catalogue 2024-25

GLOW GREEN LED PRODUCTS: Imaginative, Futuristic, Innovative, Customer Friendly, suits to Indian Scenario !

Don't be mean;
be **GREEN**
because
Green actions
speaks louder than
the grey words.



Corporate Office / R&D Centre / Production Unit



R&D LAB



SMT SECTION



OFFICE BLOCK



ASSEMBLY LINE

WHY US

- ▶ We follow the principle of Make in India and serve the nation by processing most of the raw material available in India.
- ▶ Customer satisfaction is our prime objective.
- ▶ In house R&D Lab helps us in bringing innovation & reliability to our products.
- ▶ Wide product range available under one roof which helps in catering all kinds of lighting requirements for our OEM buyers.
- ▶ We make energy efficient yet economical products with the help of latest technology & innovations.
- ▶ Our latest product range offers principle of "SAVE ENERGY-SAVE THE ENVIRONMENT & ENHANCED VALUE FOR MONEY".

INDEX	PAGE NO.	INDEX	PAGE NO.
FLOODLIGHT DOB SERIES	02	DEEP JUNCTION & SURFACE DOWNLIGHTS	18
FLOODLIGHT GLASS SERIES	03	CONCEAL DOWNLIGHTS	19
FLOODLIGHT LENSE SERIES	04	COB CONCEAL - SMD & MOVEABLE	20
STREETLIGHT PRIDE & LENSE SERIES	05	COB DEEP DOWNLIGHTS	22
HIGHBAY LIGHTS	06	COB DOWNLIGHTS REFLECTOR SERIES	23
BULK HEAD	07	COB TILTABLE DOWNLIGHTS	24
SOLAR STREET & CART LIGHTS	08	COB TRACK / WALL SPOT LIGHTS	25
ALUMINIUM SLIM & SURFACE PANELS	10	COB SURFACE CYLINDERS	26
PC SLIM RECESS PANELS	11	EXOTIC PANEL SERIES	28
PC BACKLIT PANELS	12	NICHE AREA LIGHTING	29
PC SURFACE PANELS	13	ROPE & STRIP LIGHT	30
DUAL CCT PANELS	14	OUTDOOR LIGHTING	31
EXCLUSIVE PANELS	15	HIGH WATTAGE BULBS	32
COMMERCIAL PANELS	16		



OUTDOOR LIGHTS

FLOODLIGHT DOB SERIES | FLOODLIGHT GLASS SERIES | FLOODLIGHT LENSE SERIES
STREETLIGHT LENSE SERIES | HIGHBAY | BULKHEAD | SOLAR | STREETLIGHT

FLOODLIGHT DOB SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

DFL Series



Applications



Parks



Hospital



Showrooms



Retail



Stadium

Product Code	Series	Watt	Wt. (Kg)	Surge	Dimension		
					Length (mm)	Breadth (mm)	Height (mm)
GGFL 30 DFL	DFL Series	30	0.310	6KV / 440V	150	125	25
GGFL 50 DFL	DFL Series	50	0.460	6KV / 440V	205	160	25
GGFL 100 DFL	DFL Series	100	0.770	6KV / 440V	270	210	25
GGFL 150 DFL	DFL Series	150	1.160	6KV / 440V	330	250	25
GGFL 200 DFL	DFL Series	200	1.580	6KV / 440V	380	280	25
GGFL 300 DFL	DFL Series	300	2.335	6KV / 440V	425	320	28
GGFL 400 DFL	DFL Series	400	3.250	6KV / 440V	470	360	28

It is better to light one small candle than to curse the darkness.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 66



Power Factor >0.95



CRI >80



Colour Temp WARM WHITE 3000K / NATURAL WHITE 4000K / COOL WHITE 6500K

Aluminum Die Casted Housing with moulded lense cover having driver on board technology with 6KV in-built Surge Protection.



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

FHW Series



Applications



Parks



Hospital



Showrooms



Retail



Stadium

Product Code	Series	Watt	Wt. (Kg)	Surge	Dimension		
					Length (mm)	Breadth (mm)	Height (mm)
GGFL 2030 (BC)	ECO Series	30	0.475	4KV / 440V	115	145	38
GGFL 3050 (BC)	ECO Series	50	0.980	6KV / 440V	180	185	43.5
GGFL 50100 (BC)	ECO Series	100	1.520	6KV / 440V	220	225	50
GGFL 30 (BC)	FHW Series	30	0.900	4KV / 440V	180	185	43.5
GGFL 50 (BC)	FHW Series	50	1.450	6KV / 440V	220	225	50
GGFL 100 (BC)	FHW Series	100	2.400	6KV / 440V	275	285	55
GGFL 150 (BC)	FHW Series	150	2.550	6KV / 440V	280	270	68
GGFL 200 (BC)	FHW Series	200	3.500	6KV / 440V	335	365	70
GGFL 300 (BC)	FHW Series	300	5.700	6KV / 440V	320	420	100
GGFL 400 (BC)	FHW Series	400	8.100	6KV / 440V	350	525	100
GGFL 500 (BC)	FHW Series	500	9.500	6KV / 440V	355	630	100

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 66




Power Factor >0.95



CRI >80



Colour Temp



FLOODLIGHT LENSE SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



LHW Series



LNW Series



LAB Series

Applications



Parks



Hospital



Showrooms



Retail



Stadium

Product Code	Series	Watt	Surge	Dimension		
				Length (mm)	Breadth (mm)	Height (mm)
GGFL 20LNW	LNW Series	20	4KV / 440V	135	145	30
GGFL 50LNW	LNW Series	50	6KV / 440V	200	285	38
GGFL 30LHW	LHW Series	30	4KV / 440V	170	181	30
GGFL 50LHW	LHW Series	50	6KV / 440V	195	212	30
GGFL 100LHW	LHW Series	100	6KV / 440V	270	280	35
GGFL 150LHW	LHW Series	150	6KV / 440V	295	305	35
GGFL 200LHW	LHW Series	200	6KV / 440V	323	325	35
GGFL 30LAB	LAB Series	30	4KV / 440V	200	161	37
GGFL 50LAB	LAB Series	50	6KV / 440V	245	188	37
GGFL 100LAB	LAB Series	100	6KV / 440V	295	220	44
GGFL 200LAB	LAB Series	200	6KV / 440V	375	280	44

Only when we are brave enough to explore the darkness
will we discover the infinite power of our light.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 66




Power Factor >0.95



CRI >80



Colour Temp



3000K/4000K/6500K

STREETLIGHT PRIDE & LENSE SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

PR Series



LAB Series



Applications



Parks



Hospital



Showrooms



Retail



Stadium



Road & Highways

Product Code	Series	Watt	Wt. (Kg)	Surge	Dimension			
					Length (mm)	Breadth (mm)	Height (mm)	Pole Dia
GGLSL 16 (PR)	PR Series	16	0.280	4KV / 440V	257	85	55	35
GGLSL 25/30 (PR)	PR Series	25/30	0.380	4KV / 440V	310	100	50	35
GGLSL 25LAB	LAB Series	25	0.510	4KV / 440V	291	119	46	35
GGLSL 36LAB	LAB Series	36	0.610	4KV / 440V	385	142	46	35
GGLSL 50LAB	LAB Series	50	0.780	6KV / 440V	365	172	46	35
GGLSL 100LAB	LAB Series	100	1.190	6KV / 440V	410	200	46	60
GGLSL 150LAB	LAB Series	150	1.800	6KV / 440V	535	224	38	60
GGLSL 200LAB	LAB Series	200	2.100	6KV / 440V	588	235	40	60

Travel light, live light, spread the light, be the light.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 66




Power Factor >0.95



CRI >80



Colour Temp



HIGHBAY SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Warehouse



Godown



Showrooms



Retail

Product Code	Series	Watt	Wt. (Kg)	Surge	Dimension	
					Dia (mm)	Height (mm)
GGHB 100D	HBD Series	100	1.600	6KV / 440V	300	45
GGHB 150D	HBD Series	150	2.500	6KV / 440V	370	45
GGHB 200D	HBD Series	200	2.600	6KV / 440V	370	45
GGHB 300D	HBD Series	300	3.550	6KV / 440V	400	45



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 66



Power Factor >0.95



CRI >80



Colour Temp WARM WHITE 3000K / NATURAL WHITE 4000K / COOL WHITE 6500K

Aluminium Die Casted Housing with Moulded Lense Cover having Inbuilt Industrial Grade Constant Current Constant Voltage Led Driver with in-built Surge Protection

BULKHEAD



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



**BULKHEAD
cum
STREETLIGHT**

Applications



Office



Hospital



Homes




Showrooms



Retail

Product Code	Watt	Series	Surge	Dimension		
				Length (mm)	Breadth (mm)	Height (mm)
GGSF 10 (BH)	10	Bulkhead	4KV / 440V	170	70	50
GGSF 20 (BH)	20	Bulkhead	4KV / 440V	210	100	60
GGSF 15 (SLBH)	15	Bulkhead cum Streetlight	4KV / 440V	165	82	70

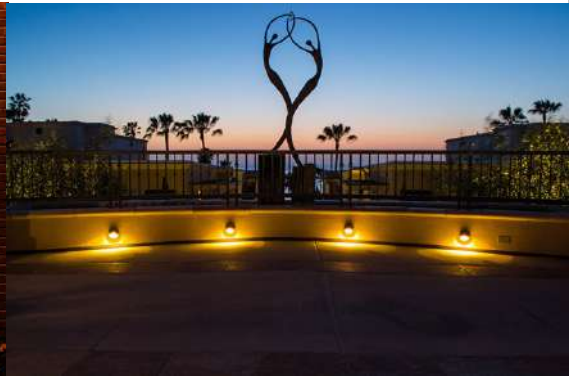

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 65



Power Factor >0.95



CRI >80

Colour Temp



WARM WHITE NATURAL WHITE COOL WHITE
W/WWW/R/G/B/P

SOLAR STREET & CART LIGHTS



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



ECO Series



CART Series



SUN Series

Applications



Office



Hospital



Homes



Showrooms



Retail

Product Code	Series	Watt	Solar Panel	Battery	Op. Hours	Dimension		
						Length (mm)	Breadth (mm)	Height (mm)
GG CLSSL60W	Sun	8 - 12W	4.5V / 15W	3.2V / 20AH	8 - 12 Hrs	610	230	80
GG CLSSL100W	Sun	10 - 15W	6V / 25W	3.2V / 30AH	8 - 12 Hrs	747	280	80
GG CLSSL200W	Sun	18 - 25W	6V / 60W	3.2V / 40AH	8 - 12 Hrs	1045	390	95
GG PCSSL6	Eco	30W	5V / 4.5W	1 x 2000MA	8 - 12 Hrs	450	150	45
GG PCSSL7	Eco	50W	5V / 6W	2 x 1200MA	8 - 12 Hrs	495	150	45
GG PCSSL8	Eco	80W	5V / 7W	2 x 1500MA	8 - 12 Hrs	540	150	45
GG PCSSL9	Eco	100W	5V / 8W	2 x 2000MA	8 - 12 Hrs	580	150	45
GG PCSLL7	Cart	7W	6V / 1W	2 x 12000MA	5 - 6 Hrs	150	-	70
GG PCSLL8	Cart	8W	6V / 2W	3 x 12000MA	5 - 6 Hrs	175	-	70
GG PCSLL9	Cart	9W	6V / 3W	4 x 12000MA	5 - 6 Hrs	210	-	70

CART LIGHT: It can be hung on hook, can be placed anywhere with help of stand, can sticks on Iron base with in-built magnet mechanism.

As we work to create light for others, we naturally light our own way.



PANEL LIGHTS

ALUMINUM SLIM & SURFACE PANELS | PC SLIM & SURFACE PANELS | PC SURFACE PANEL
PC BACKLIT PANEL | ADJUSTABLE PANEL | DUAL CCT RECESS & SURFACE PANELS | COMMERCIAL PANELS

ALUMINUM SLIM & SURFACE PANEL



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Office



Hospital



Homes



Bedroom



Living Room

Product Code	Type	Watt	Dimension			
			Length/Dia (mm)	Breadth (mm)	Height (mm)	Cut Out (mm)
GGDLPL 3 R / SQ (E)	Recessed	3	85	85	23	70
GGDLPL 6 R / SQ (E)	Recessed	6	120	120	23	105
GGDLPL 9 R / SQ (E)	Recessed	9	145	145	23	125
GGDLPL 12 R / SQ (E)	Recessed	12	170	170	23	155
GGDLPL 18 R / SQ (E)	Recessed	18	225	225	23	205
GGDLPL 24 R / SQ (E)	Recessed	24	300	300	23	280
GGDLPL 6 R / SQ SM	Surface	6	120	120	35	-
GGDLPL 12 R / SQ SM	Surface	12	170	170	35	-
GGDLPL 18 R / SQ SM	Surface	18	225	225	35	-

Give light and people will find the way.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp 3000K/4000K/6500K



Note: Colour Temp.: Red / Green / Blue also available in 3W & 6W panels

Sleek Recess & Surface Panel with integrated edge lit technology installed with high efficient low glare sheet for optimum light distribution having die casted aluminum housing and Constant Current Constant Voltage LED Driver.



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

CA Series



CR Series



OR Series



Applications



Office



Hospital



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension			
			Length/Dia (mm)	Breadth (mm)	Height (mm)	Cut Out (mm)
GGDLPL 3 R / SQ (ECR)	CR Series	3	85	85	28	70
GGDLPL 6 R / SQ (ECR)	CR Series	6	120	120	28	105
GGDLPL 12 R / SQ (ECR)	CR Series	12	170	170	28	150
GGDLPL 18 R / SQ (ECR)	CR Series	18	220	220	28	205
GGDLPL 3 R / SQ (EOR)	OR Series	3	92.5	92.5	30	75
GGDLPL 6 R / SQ (EOR)	OR Series	6	118	118	30	100
GGDLPL 12 R / SQ (EOR)	OR Series	12	142	142	30	125
GGDLPL 15 R / SQ (EOR)	OR Series	15	167	167	30	150
GGDLPL 18 R / SQ (EOR)	OR Series	18	217	217	30	200
GGDLPL 9 R / SQ (CADJ)	CA Series	9	115	115	25	45 - 80
GGDLPL 15 R / SQ (CADJ)	CA Series	15	175	175	25	45 - 130

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp

WARM WHITE 3000K
NATURAL WHITE 4000K
COOL WHITE 6500K

PC BACKLIT PANEL



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

3 in 1
also
available

RDL Series



GM Series

TG Series



Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension			
			Length/Dia (mm)	Breadth (mm)	Height (mm)	Cut Out (mm)
GGTG 6 R / SQ	TG Series	6	105	105	22	75
GGTG 12 R / SQ	TG Series	12	130	130	22	100
GGTG 15 R / SQ	TG Series	15	155	155	24	125
GGTG 20 R / SQ	TG Series	20	180	180	26	150
GGRDL 5 R / SQ	RDL Series	5	82	82	35	65
GGRDL 8 R / SQ	RDL / GM Series	8	115	115	35	100
GGRDL 12 R / SQ	RDL Series	12 / 15	145	145	35	125
GGRDL 15 R / SQ	RDL / GM Series	15	165	165	35	150
GGRDL 22 R / SQ	RDL Series	22	220	220	35	200

Give light, and the darkness will disappear of itself.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp 3000K/4000K/6500K



Note: Colour Temp.: Red / Green / Blue also available in 3W & 6W panels

Low glare recess and surface mounted PC housing downlighters having backlit technology complete with Industrial Grade Constant Current Constant Voltage LED Driver.

PC SURFACE PANEL



High Quality LED




50,000 Lifespan



Energy Saving



High CRI

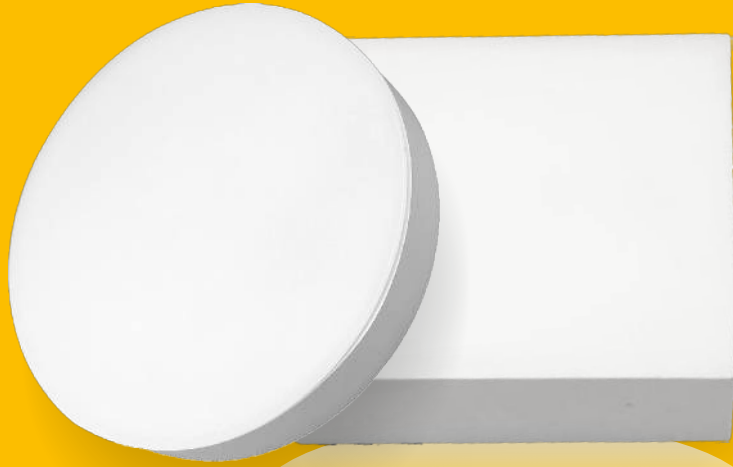

FD Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension		
			Length (mm)	Breadth (mm)	Height (mm)
GGDLPL 6 R / SQ (SFD)	FD Series	6	90	90	27
GGDLPL 12 R / SQ (SFD)	FD Series	12	120	120	27
GGDLPL 18 R / SQ (SFD)	FD Series	18	155	155	27
GGDLPL 24 R / SQ (SFD)	FD Series	24	190	190	27
GGDLPL 8 R / SQ (SDD)	DD Series	8	90	90	33
GGDLPL 15 R / SQ (SDD)	DD Series	15	145	145	33



In the right light,
at the right time,
EVERYTHING IS
EXTRAORDINARY.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp

WARM WHITE 3000K
NATURAL WHITE 4000K
COOL WHITE 6500K

DUAL CCT RECESS & SURFACE PANEL



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Café



Bar



Homes



Bedroom



Living Room

Product Code	Type	Series	Watt	Surface Ring	Dimension		
					Dia (mm)	Height (mm)	Cut Out (mm)
GGDCCT 3+3 R (EPC)	Recessed	PC	3+3	Available	105	28	65
GGDCCT 6+6 R (EPC)	Recessed	PC	6+6	Available	145	28	100
GGDCCT 12+12 R (EPC)	Recessed	PC	12+12	Available	190	28	150
GGDCCT 3+3 (E) R/SQ	Recessed	Metal	3+3	NA	105	28	65
GGDCCT 6+3 (E) R/SQ	Recessed	Metal	6+3	NA	145	28	100
GGDCCT 12+4 (E) R/SQ	Recessed	Metal	12+4	NA	190	28	150
GGDCCT 3+3 SM R/SQ	Surface	Metal	3+3	NA	105	35	-
GGDCCT 6+3 SM R/SQ	Surface	Metal	6+3	NA	145	35	-
GGDCCT 12+4 SM R/SQ	Surface	Metal	12+4	NA	190	35	-

To love beauty is to see light.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 300VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



Note: Colour Temp.: + R / B / G / P / PGB / PBGRY / 3K

Aluminum Die casted recess and surface mounted downlighter with integrated edge lit technology with glowing side diffuser on switching, complete with Industrial Grade Constant Current Constant Voltage tuneable LED Driver.



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



VV Series

PP Series



Applications



Office



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension			
			Length / Dia (mm)	Breadth (mm)	Height (mm)	Cut Out (mm)
GGPP 12 RD / SQ	PP Series	12	165	165	28	155
GGVV 6 RD / SQ	VV Series	6	95	95	25	65
GGVV 12 RD / SQ	VV Series	12	130	130	25	95
GGVV 18 RD / SQ	VV Series	18	180	180	25	160
GGVV 24 RD / SQ	VV Series	24	220	220	25	195



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



COMMERCIAL PANEL



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Office



Hospital



Showrooms



Retail

Product Code	Watt	Weight (Kg)	Dimension		
			Length (mm)	Breadth (mm)	Height (mm)
GGLD 36 (P)	36	1.70	595	595	40
GGLD 48 (P)	48	1.70	595	595	40



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp WARM WHITE 3000K / NATURAL WHITE 4000K / COOL WHITE 6500K

CRCA powder coated housing with Aluminum extrusion frame having high efficient low glare acrylic diffuser sealed with it for optimum light distribution having industrial grade driver.



DOWNLIGHTS

DEEP / JUNCTION & SURFACE DOWNLIGHT | CONCEAL DOWNLIGHT

COB CONCEAL SMD & MOVEABLE

DEEP / JUNCTION & SURFACE DOWNLIGHTS



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



JN Series



GL Series



DP Series



GL Series



PN Series



PN Series

Applications



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Type	Dimension		
				Dia (mm)	Height (mm)	Cut Out (mm)
GGDEEP 3M	JN Series	3W	Deep / Junction	80	33	45
GGDEEP 3M	JN Series	3W	Deep	80	45	45
GGDEEP 8SH	DP Series	8W	Deep	85	65	45
GGDEEP 15SH	DP Series	15W	Deep	140	58	45
GGSF 8 (GL)	GL Series	8W	Surface	85	45	-
GGSF 15 (GL)	GL Series	15W	Surface	140	45	-
GGDEEP 7+7 (PAN)	PN Series	7W+7W	Deep	85	45	45
GGDEEP 12+12 (PAN)	PN Series	12W+12W	Deep	115	45	45

Note: All above Products are CCT Tuneable



GOOD LIGHT
is universally
accepted as a
TRUE GIFT.

Operating Voltage 100 - 440VAC

IP Rating IP 20

Power Factor >0.95

CRI >80

Colour Temp WARM NATURAL COOL
WHITE WHITE WHITE
W/WWW/R/G/B/P

Note: PN Series : Colour Temp.: + R / B / G / P / PGB / PBGRY / 3K

Low glare downlighters made up of polycarbonate housing suitable for deep & junction boxes.

CONCEAL DOWNLIGHTS



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



SR Series



MIR Series



LGP Series



CMT Series



BPS Series



SUN Series



PA Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Housing Material	CCT Tunable	Dimension		
					Dia (mm)	Height (mm)	Cut Out (mm)
GGCL 7BPS	BPS Series	7	PC + AL	Available	110	50	75
GGCL 7MIR	MIR Series	7	PC + AL	Available	110	50	75
GGCL 7CMT	CMT Series	7	PC + AL	Available	110	50	75
GGCL 9SR	SR Series	9	AL	Available	111	45	75
GGCL 9PA	PA Series	9	AL	Available	111	45	75
GGCL 9LGP	LGP Series	9	AL Casted	Available	123	42	75
GGCL 7SUN	SUN Series	7	PC	Available	110	30	75



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp



W/WW/R/G/B/P

COB CONCEAL - SMD & MOVEABLE



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



LD Series



ST Series



CD Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension		
			Dia (mm)	Height (mm)	Cut Out (mm)
GGDL 4LD	LD Series	4	70	40	55
GGDL 7LD	LD Series	7	105	50	80
GGDL 12LD	LD Series	12	130	55	100
GGDL 3CD	CD Series	3	70	34	40
GGDL 7CD	CD Series	7	106	55	75
GGCL 7ST (W+B)	ST Series	7	110	44	75
GGCL 7ST (B+B)	ST Series	7	110	44	75
GGCL 7ST (W+RG)	ST Series	7	110	44	75
GGCL 7ST (B+RG)	ST Series	7	110	44	75

Darkness cannot drive out darkness: only light can do that.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



Recessed cob spot light made up of PC housing with Industrial Grade Constant Current Constant Voltage Led Driver.



COB LIGHTS

COB DEEP DOWNLIGHT | TILTABLE COB

COB TRACK / WALL SPOTS | COB SURFACE CYLINDERS

COB DEEP DOWNLIGHT



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



DPC Series



DPC Series

3 in 1
also
available

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt
GGLD D7 (DPC)	DPC Series	7
GGLD D12 (DPC)	DPC Series	12
GGLD D18 (DPC)	DPC Series	18

Dimension		
Dia (mm)	Height (mm)	Cut Out (mm)
60	70	50
85	80	75
95	100	85

In all three above Product Codes Housing Option are White / Black



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp

WARM WHITE 3000K
NATURAL WHITE 4000K
COOL WHITE 6500K

Recessed cob spot light made up of aluminium die casted housing with Industrial Grade Constant Current Constant Voltage Led Driver.

COB DOWNLIGHTS - REFLECTOR SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



DCC Series



NRC Series



DRC Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Housing Colour	Reflectors	Dimension		
					Dia (mm)	Height (mm)	Cut Out (mm)
GGLD D7 (DRC)	DRC Series	7	White / Black	Rose Gold / Gun Metal	75	60	65
GGLD D12 (DRC)	DRC Series	12	White / Black	Rose Gold / Gun Metal	85	80	75
GGLD D18 (DRC)	DRC Series	18	White / Black	Rose Gold / Gun Metal	95	100	85
GGLD N7 (NRC)	NRC Series	7	White / Black	Rose Gold / Gun Metal	72	60	65
GGLD N12 (NRC)	NRC Series	12	White / Black	Rose Gold / Gun Metal	87	70	80
GGLD N18 (NRC)	NRC Series	18	White / Black	Rose Gold / Gun Metal	95	77	88
GGLD D9 (DCC)	DCC Series	6 + 3	White	-	90	55	75
GGLD D16 (DCC)	DCC Series	12 + 4	White	-	105	60	85

There are two ways of spreading light;
to be the candle or the mirror that reflects it.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



3000K/4000K/6500K

COB TILTABLE DOWNLIGHTS



High Quality LED



50,000 Lifespan



Energy Saving



High CRI

3 in 1
also
available



PM Series



ZM Series



HT Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension		
			Dia (mm)	Height (mm)	Cut Out (mm)
GGLD 6 (PM)	PM Series	6	72	40	60
GGLD 12 (PM)	PM Series	12	85	50	65
GGLD 18 (PM)	PM Series	18	105	60	85
GGLD 25 (HT)	HT Series	25	120	90	110
GGLD 30 (HT)	HT Series	30	150	100	130
GGLD 50 (HT)	HT Series	50	170	120	150
GGLD 20ZM	ZM Series	20	110	90	95
GGLD 30ZM	ZM Series	30	135	120	115
GGLD 40ZM	ZM Series	40	160	130	145

You may think your light is small,
but it can make a huge difference in other people's lives.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



Recessed cob spot light made up of aluminium die casted housing with Industrial Grade Constant Current Constant Voltage Led Driver.



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Office



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Watt	Wall Spot Base	Housing Colour	Reflectors	Dimension	
					Dia (mm)	Height (mm)
GGNTR 3 (COB)	3	Available	White	Rose Gold	30	145
GGNTR 6 (COB)	6	Available	White	Rose Gold	35	150
GGNTR 9 (COB)	9	Available	White	Rose Gold	45	170
GGNTR 10 (COB)	10	Available	White / Black	Lense / Reflector	50	130
GGNTR 20 (COB)	20	Available	White / Black	Lense / Reflector	65	160
GGNTR 30 (COB)	30	Available	White / Black	Lense / Reflector	75	180
GGNTR 50 (COB)	50	Available	White / Black	Reflector	90	180



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp

WARM WHITE 3000K NATURAL WHITE 4000K COOL WHITE 6500K

COB SURFACE CYLINDERS



High Quality LED



50,000 Lifespan




Energy Saving



High CRI



CPC Series



TLT Series



REF Series

Applications



Office



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Housing Colour	Dimension	
				Dia (mm)	Height (mm)
GGLD 6RSM (REF)	REF Series	6	Black	55	80
GGLD 12RSM (REF)	REF Series	12	Black	75	100
GGLD 18RSM (REF)	REF Series	18	Black	95	115
GGLD 6RSM (NREF)	NREF Series	6	Black	65	75
GGLD 12RSM (NREF)	NREF Series	12	Black	75	90
GGLD 18RSM (NREF)	NREF Series	18	Black	85	95
GGLD 7RSM (ADJ)	ADJ Series	7	Black	60	85
GGLD 12RSM (ADJ)	ADJ Series	12	Black	75	95
GGLD 18RSM (ADJ)	ADJ Series	18	Black	85	110
GGLD 12RSM (CPC)	CPC Series	12	White / Black	80	85
GGLD 12RSM (TLT)	TLT Series	12	White	55	162

Lighting always comes with profound **MAGNIFICENCE.**

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp 3000K/4000K/6500K

COB Surface Downlight - Cylinder shape housing made up of aluminum die casting complete with Constant Current Constant Voltage Led Driver.



ARCHITECTURAL LIGHTING

EXOTIC PANEL SERIES | ROPE + STRIP

NICHE AREA LIGHTING | LANDSCAPE & OUTDOOR WALL LIGHTS

EXOTIC PANEL SERIES



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



PCD Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Shape	Dimension		
				Dia (mm)	Height (mm)	Cut Out (mm)
GGEPS 12 PCD	PCD Series	12	Round	120	52	110
GGEPS 18 PCD	PCD Series	18	Round	152	56	140



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20



Power Factor >0.95



CRI >80



Colour Temp WARM WHITE 3000K / NATURAL WHITE 4000K / COOL WHITE 6500K

Recessed downlighters made up of polycarbonate housing - glare free light output complete with Industrial Grade Constant Current Constant Voltage Led Driver.

NICHE AREA LIGHTING



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



STRIKER Series



STRIKER Series



LENSE STRIKER Series



SPOT Series

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension		
			Dia (mm)	Cut Out (mm)	Height (mm)
GGNAL 2S	Spot	2	44	34	16
GGNAL 3ST	Striker	3	70	-	15
GGNAL 3STL	Lense Striker	3	60	-	17
GGNAL 5STN	Striker	5	63	-	16



TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 440VAC



IP Rating IP 20




Power Factor >0.95



CRI >80



Colour Temp



ROPE & STRIP LIGHTS



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	LEDs / Meter	Roll Size (Meter)	IP Rating
GG2835 120D	Rope Light	9W / Mtr	120	50	IP 65
GGST 2835 (120) NWP	Strip Light	6W / Mtr	120	5	IP 20
GGST 2835 (240) NWP	Strip Light	12W / Mtr	240	5	IP 20





High Quality LED



50,000 Lifespan



Energy Saving



High CRI



BLOSSOM Series



CROWN Series



FK Series



SPK Series

LANDSCAPE LIGHTS

Applications



Office



Hospital



Homes



Showrooms



Retail



Bedroom



Living Room

Product Code	Series	Watt	Dimension		
			Length (mm)	Breadth (mm)	Height (mm)
GGUDL 3 W (HK)	HK Series	1 x 3W	75	80	65
GGUDL 2 x 3 W (HK)	FK Series	2 x 3W	140	80	65
GGUDL 2WA(2WY)	Crown Series	2 x 1W	70	70	40
GGUDL 4WA(2WY)	Crown Series	4 x 1W	120	75	40
GGUDL 6WA(2WY)	Crown Series	6 x 1W	170	80	40
GGUDL 8WA(2WY)	Crown Series	8 x 1W	230	90	50
GGUDL 4WB(2WY)	Kiara Series	4 x 1W	110	80	35
GGUDL 6WB(2WY)	Kiara Series	6 x 1W	158	80	35
GGUDL 4WA(4WY)	Disc Series	4 x 1W	60	-	-
GGUDL 4WB(4WY)	Blossom Series	6W	123	-	50
GGOLSL 7(COB)	SPK Series	7W	60	-	78

Shine your own light. Follow your own path.

TECHNICAL SPECIFICATIONS



Operating Voltage 100 - 300VAC



IP Rating IP 65



CRI >80



Colour Temp WARM WHITE 3000K / NATURAL WHITE 4000K / COOL WHITE 6500K

HIGH WATTAGE BULB



High Quality LED



50,000 Lifespan



Energy Saving



High CRI



Applications



Hospital



Homes



Showrooms



Retail

Product Code	Series	Watt	Dimension		
			Dia (mm)	Height (mm)	Surge
GGBL 30HWL	HWL Series	30	180	115	4KV
GGBL 40HWL	HWL Series	40	200	125	4KV
GGBL 50HWL	HWL Series	50	220	135	4KV





TESTIMONIALS

Coming together is a **beginning**, staying together is **progress**
and working together is **SUCCESS**.



GLOW GREEN ENERGY LTD.

14/8, Site 4, Sahibabad Industrial Area,
Ghaziabad - 201010 (UP)
Tel: +91 - 9910990565 / 8800992103
E-mail: info@glowgreen.in
Website: www.glowgreen.in

"WE DO OEM SERVICES."

We are fully committed for...

